

**MACSEAL PL**

**HOT-APPLIED PARKING LOT JOINT AND CRACK SEALANT**

**PRODUCT DESCRIPTION**

**MACSEAL PL** is a premium-quality, high-performance, hot-applied, single-component joint and crack sealant.

**MACSEAL PL** is manufactured using engineered asphalt cements, polymers, oil resins, and UV inhibitors.

**MACSEAL PL** is uniquely formulated to combat both flow from the joint and pick-up by vehicle tires, foot traffic, skateboards, and roller blade wheels in high surface temperatures.

**GENERAL PRODUCT FEATURES**

- Cures to a non-tacky finish
- Can be applied over a wide range of temperatures
- Engineered for moderate to cold in-service climate temperatures
- Slightly stiffer in nature and ideal for applications such as driveways, parking lots, bicycle trails, and areas receiving foot traffic
- Works well to fill the larger cracks and for routine maintenance of asphalt and concrete pavements
- Easy to apply via a gravity-fed mechanism (e.g. pour pot, walk behind units, etc.) as well as via pump and hose/wand method
- Adheres very well to both hot mix asphalt and Portland cement concrete
- Engineered specifically for oil jacketed double boiler kettles. Not recommended for direct fire melters.
- Prevents the intrusion of water and incompressibles into the cracks of asphaltic and Portland cement concrete pavements


**RECOMMENDED USE**

**MACSEAL PL** is designed for the routine maintenance and preservation of asphalt or concrete pavements on driveways, parking lots, bicycle paths, and walkways.

**SPECIFICATIONS AND TYPICAL RESULTS**

TEST	TYPICAL DATA	SPEC.	
		Min	Max
Cone Pen, 25°C, dmm	43	-	45
Resilience, 25°C, %	51	40	-
Softening Point, °C	94	93	-
Ductility, 25 °C	35	30	-
Flow, 60°C, mm	0	-	-
Flexibility, -7°C., 25 mm Mandrel	Pass	Pass	
Specific Gravity, 15°C	1.230	-	-

**TEMPERATURE VISCOSITY CHART**

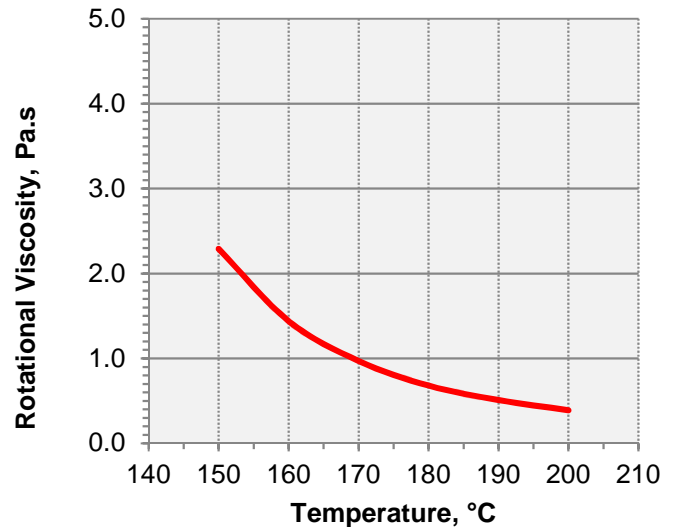

**CERTIFICATION OF QUALITY**

**McAsphalt Industries Limited** is accredited to the quality management standard **ISO 9001**, the environmental management standard **ISO 14001**, and the occupational health and safety standard **ISO 45001**.

Each lot of **MACSEAL PL** is produced using the strictest quality, safety, and environmental guidelines. Each production lot is tested to ensure it meets or exceeds all performance requirements and is delivered with a Certificate of Analysis.



**MCASPALT INDUSTRIES LIMITED**

8800 Sheppard Ave East T 416.281.8181 TF 1.800.268.4238  
 Toronto, ON M1B 5R4 F 416.281.8842 E info@mcasphalt.com

mcasphalt.com  
 ISO 9001/14001/45001

## MACSEAL PL

### HOT-APPLIED PARKING LOT JOINT AND CRACK SEALANT

---

#### APPLICATION GUIDELINES

For detailed **MACSEAL PL** joint and crack preparation or specific application instructions, refer to specifying agency publications or contact an **MCA** representative.

#### APPLICATION TEMPERATURES

Recommended pouring temperature: 175 to 195°C (347 to 383°F)

Maximum safe heating temperature: 200°C (392°F)

#### MELTING EQUIPMENT

**MACSEAL PL** must be melted in an oil jacketed double boiler kettle equipped with a mechanical agitator and separate temperature thermometers for both the oil bath and the melting vat.

#### COVERAGE

**MACSEAL PL** weighs approximately 1.2 kg/L (9.6 lb/gal). A joint 12.7 mm x 12.7 mm (½ x ½ in) requires approximately 17.7 kg/100 linear meters (12.0 lb/100 linear feet).

#### PACKAGING, STORAGE AND HANDLING

**MACSEAL PL** is available in the following packaging:

- 2 x 11 kg (25 lb) polybags in a high-strength, corrugated cardboard container. **MACSEAL PL** in boxes should be kept in a dry environment.

#### PRODUCT SUPPORT

With the **MCA Advantage**, you get a partner and advisor who will consult with you about designs, specifications, technical services, processes, and material selection. By developing innovative, custom-designed products that offer additional benefits such as peak performance in unique conditions, improved field performance, and greater environmental and health benefits, the **MCA Advantage** provides significant long-term cost savings, resulting in lower total cost of ownership.



#### MCASPALT INDUSTRIES LIMITED

8800 Sheppard Ave East T 416.281.8181 TF 1.800.268.4238  
Toronto, ON M1B 5R4 F 416.281.8842 E info@mcaspalt.com

mcaspalt.com  
ISO 9001/14001/45001